



PRODUCT SPECIFICATION DRAWING

PEXRITE® #707 POP-UP™

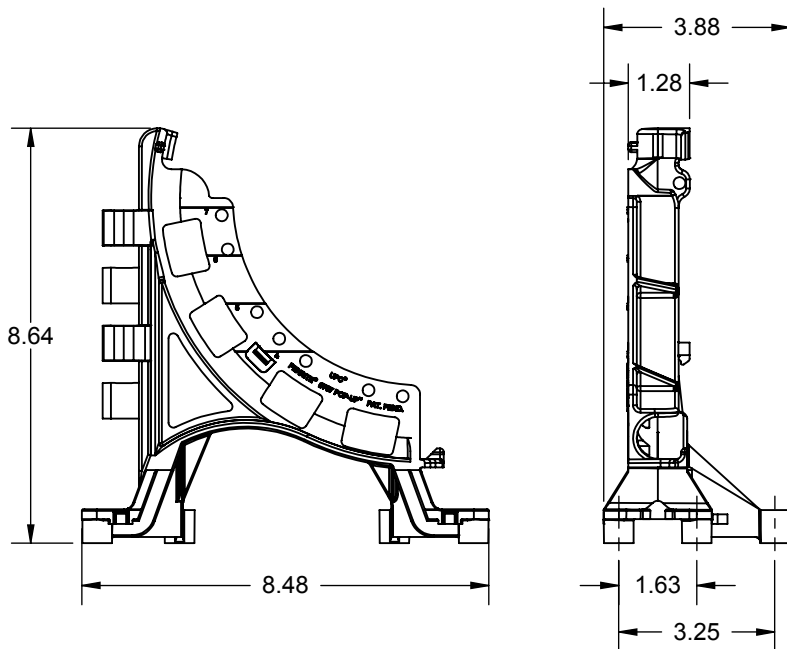


ALL DIMENSIONS IN INCHES

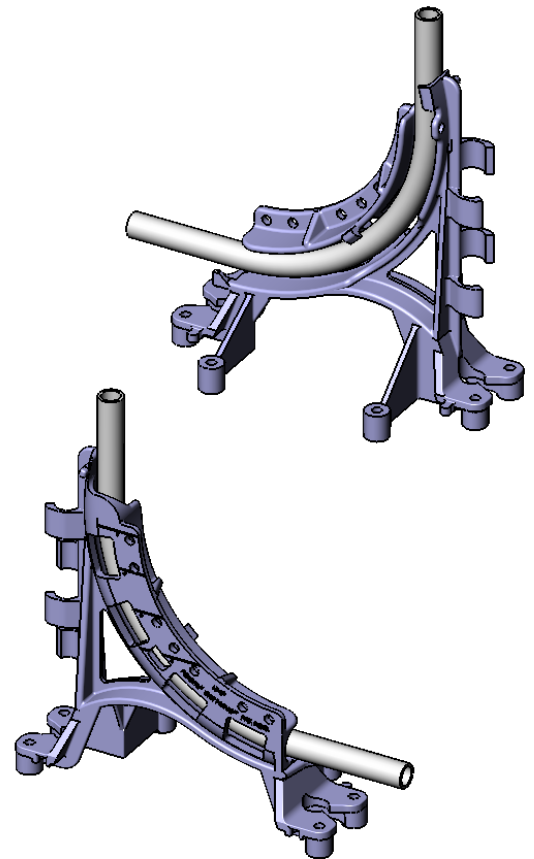

The PEXRITE® #707 POP-UP™ supports one 3/8" - 7/8" O.D. flexible tubing line (PEX or softer copper). Ideal for positioning tubing prior to concrete slab pouring. For elevated slabs, nail bracket to form decking or edge form. For slab-on-grade (ground work), secure bracket with #4 rebar driven into the ground.

Product Information:

- Material: Reinforced Polypropylene
- Temperature range "post install": -10°F to +190°F
- Load rating: 25 pounds
- Patent Pending
- UPC / IPC / IAPMO listed



Product Submittal	
Job Name:	
Date:	
Part Number:	Qty:
Architect / Owner:	
Contractor:	
Notes:	

THIS INFORMATION IS PROPRIETARY TO HUBBARD ENTERPRISES AND IS SUBJECT TO CHANGE WITHOUT NOTICE. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF HUBBARD ENTERPRISES IS PROHIBITED.

.....HUBBARD ENTERPRISES.....

HOLDRITE®

"Converting Makeshift Methods into Engineered Solutions"