


# PRODUCT SPECIFICATION DRAWING

## HOLDRITE® FLAME FIGHTER™ #221-S & #222-S

### (25/50 Plenum rated)

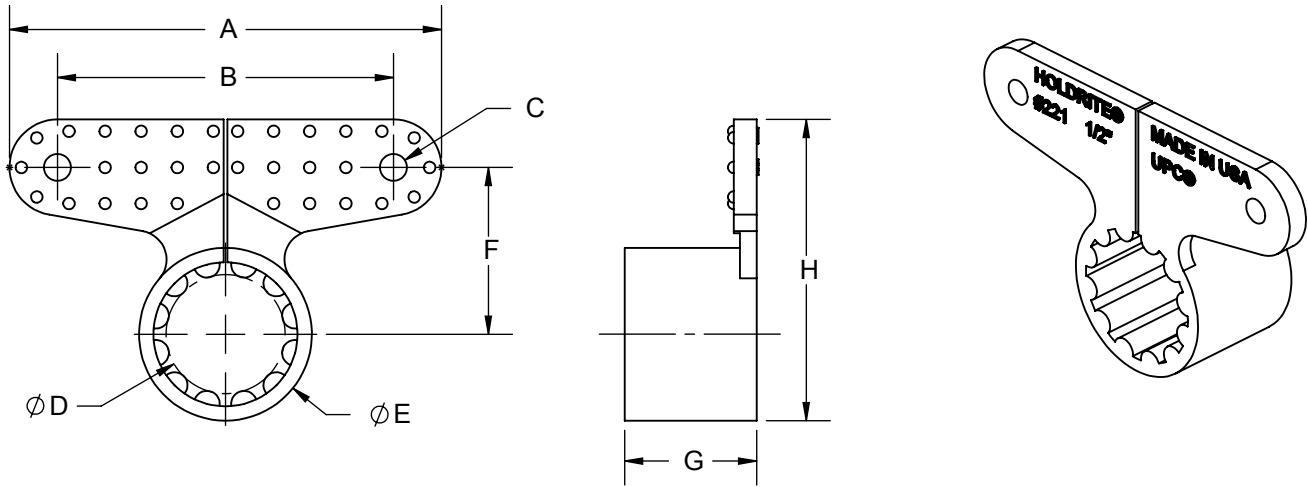

MODEL	SIZE	A	B	C	D	E	F	G	H
#221-S	1/2"	2.25	1.75	Ø.14	Ø.62	Ø.90	0.87	0.69	1.57
#222-S	3/4"	2.25	1.75	Ø.14	Ø.87	Ø1.17	0.89	0.69	1.72

All dimensions in inches. Dimensions (approximate)

**Flame and smoke rated plastic clamp for 1/2" and 3/4" tubing. Meets ASTM E-84 25/50 and UL94V-0. Helps to minimize noise transfer and isolates against dissimilar metal contact. Compatible with Copper, PEX, CPVC and other tubing.**

#### Product Information:

- Material: Kynar Flex, yellow, UL94V-0
- Temperature range: -20°F to +200°F
- Meets ASTM E-84 25/50 & UL94V-0
- UPC / IPC / IAPMO listed



THIS INFORMATION IS PROPRIETARY TO HOLDRITE AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IT MAY NOT BE REPRODUCED IN PART OR WHOLE WITHOUT WRITTEN AUTHORIZATION.

# HOLDRITE®

CONVERTING MAKESHIFT METHODS INTO ENGINEERED SOLUTIONS<sup>SM</sup>

800-321-0316 OR 760-744-6944 / FAX: 760-744-0507 / WWW.HOLDRITE.COM  
spec\_221-S\_222-S\_RevF

Product Submittal	
Job Name:	
Date:	
Part Number:	Qty:
Architect / Owner:	
Contractor:	
Notes:	