
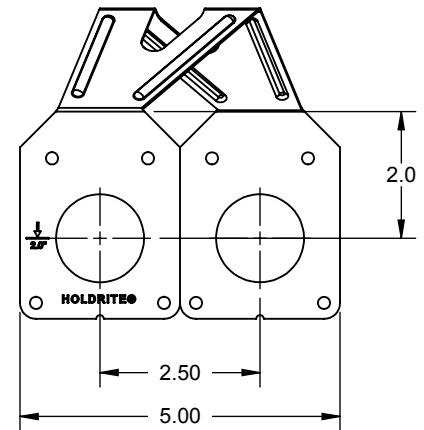
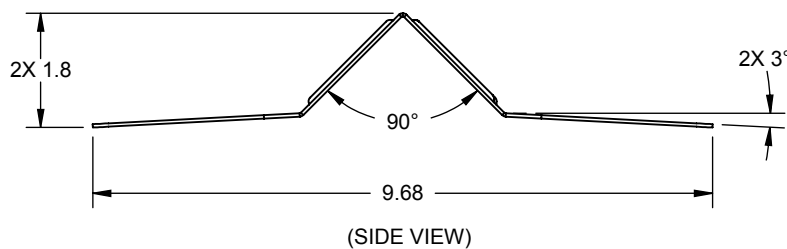


PRODUCT SPECIFICATION DRAWING

HOLDRITE® HANGOVER™ #125-D

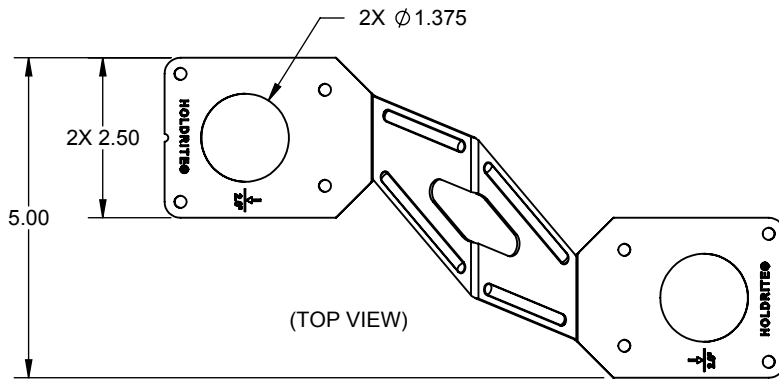

(TYPICAL APPLICATION END VIEW
AFTER INSTALLATION & PRIOR
TO TUBING PLACEMENT)

ALL DIMENSIONS IN INCHES

The HOLDRITE® HANGOVER™ concrete insert brackets are installed on wood forms for use with cast-in-place concrete slabs. When the wood forms are stripped away, the HOLDRITE® HANGOVER™ bracket's end tabs are bent into position and are ready to support up to 1" CTS for horizontal pipe runs.

Product Information:

- Material: 18 gage CRS, galvanized per ASTM-A653, G90
- Load rating: 150 pound load rating in 3000 psi concrete, safety factor = 3
- Complies with load requirements of MSS SP-58
- Supports 1/2", 3/4" and 1" tubing with available inserts

THIS INFORMATION IS PROPRIETARY TO HOLDRITE AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IT MAY NOT BE REPRODUCED IN PART OR WHOLE WITHOUT WRITTEN AUTHORIZATION.

HOLDRITE®

CONVERTING MAKESHIFT METHODS INTO ENGINEERED SOLUTIONSSM
800-321-0316 OR 760-744-6944 / FAX: 760-744-0507 / WWW.HOLDRITE.COM
spec_125-D_RevD

Product Submittal	
Job Name:	
Date:	
Part Number:	Qty:
Architect / Owner:	
Contractor:	
Notes:	