

## PRODUCT SPECIFICATION DRAWING QUICKSTAND™ 24" X 24" (Water Heater & Equipment Support) #40-S-24-A (assembled) and #40-S-24-U (unassembled)

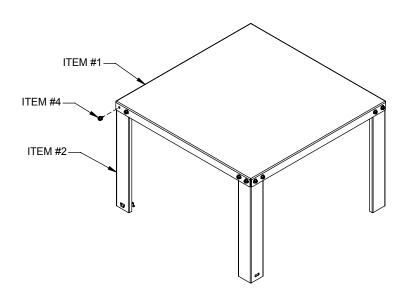



The QUICKSTAND™ #40-S-24- (A or U) stands safely elevates water heaters and other equipment above the floor (1,200 lbs rating).

## 16" 14.75 TYP 2.25 TYP

## **Product Information:**

Material:

Item #1: Top, 12 gage CRS, galvanized

Item #2: Leg, 16 gage CRS, galvanized, 4 places

Item #3: Safety Clip, 14 gage CRS, galvanized, 2 places Item #4: Screw, PH, Sems, #1/4 X 1/2"L (w / external starwasher), 16 places


Item #5: Lag Bolt, #1/4 X 2-1/2"L, self-drilling, 2 places

(items #3 and #5 included with product)



- Engineered and lab tested to meet Uniform Plumbing Code (UPC) and International Plumbing Code (IPC) requirements, including elevation of water heater's ignition source 18" above the floor
- Holds up to 1,200 pounds capacity (up to 100 U.S. gallon tanks)
- QUICKSTAND™ weight 25-1/2 pounds without packaging
- Available in asembled and unassembled configurations

800



**Product Submittal** 

Qty:

Job Name: Date:

Part Number:

Contractor:

Notes:

Architect / Owner:

THIS INFORMATION IS PROPRIETARY TO HOLDRITE AND IS SUBJECT TO CHAWITHOUT NOTICE. IT MAY NOT BE REPRODUCED IN PART OR WHOLE WITH WRITTEN AUTHORIZATION.	
	]® ] ]
CONVERTING MAKESHIFT METHODS INTO ENGINEERED SOLUTIONS	SM
0-321-0316 OR 760-744-6944 / FAX: 760-744-0507 / WWW.HOLDRITE spec 40-S-24 RevI	.COM