
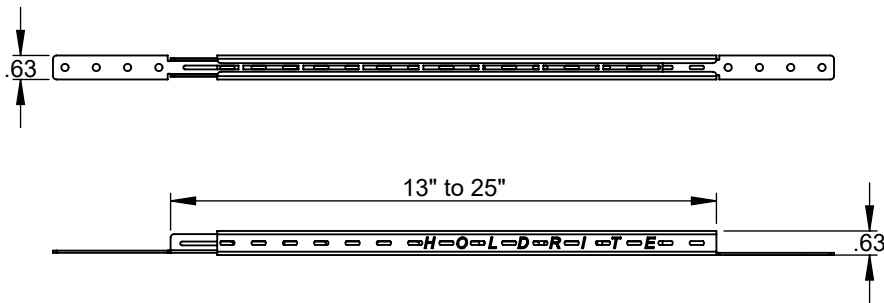


HoldRite®

Stout Bracket® SB1 & SB2

Slot pattern permits wide versatility in positioning. Mount fittings, clamps, etc. vertically or horizontally. Use with high-ear or wing-ear fittings. Supports shower head, tub spout, piping, etc. Holds HoldRite Pro Clamp™, Stout Clamp™ and others. Attaches between studs, joists, etc. Bendable end tabs allow recessed or surface mounting. Use anywhere high strength is required.

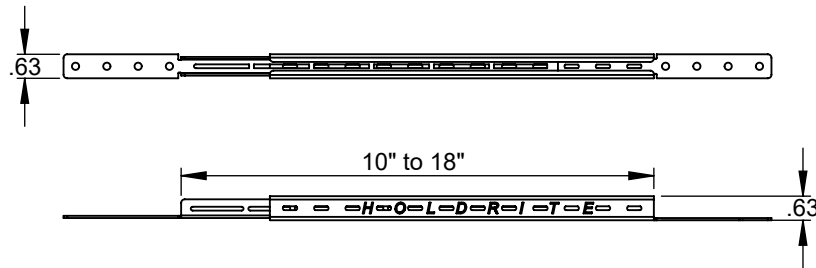

All Dimensions in Inches

Product Information

- Material: 16 gage CRS, galvanized per ASTM-A653, G90
- Fasteners are not included. Compatible with a range of screw types and sizes based on installation requirements. Previous kits included #8 x 5/8 in. sheet metal screws.
- UPC / IPC / IAPMO listed
- UL listing

#SB1

Beam Span Inches	Maximum Load (lbs.)	
	Center Pt.	Uniform Load
10	400	1150
14.5	164	300
18	104	131

#SB2

Beam Span Inches	Maximum Load (lbs.)	
	Center Pt.	Uniform Load
18	158	225
22.5	124	165
24	68	120

Product Submittal	
Name	
Date	
Architect/Owner	
Contractor	
Tag	
Notes	

